

REV LTR	DESCRIPTION	DATE	APPVD.
-	Orig. Release	4/12/22	MLG
A	Added 5.0V in Para. 3.7.5 Corrected Table # in Para. 4.8 & Revised Table V.	6/14/22	SPG
B	Added PDA for Frequency Aging on page 3. Added Frequency Stability Vs. Supply Voltage in Table I.	8/12/22	MLG
C	Updated Phase Jitter characteristics in Table I. Slight changes to Para. 1. and 4.1.	1/20/24	MLG

XE7K SERIES
HC/ACMOS OSCILLATORS
FOR SPACE & HI-REL APPLICATIONS
500 KHz to 125 MHz
(5 x 7 mm, SMD, 2.5V, 3.3 V & 5.0V)

(Refer to Page 5 for Reduced QCI Models XE7E, XE7B & XE7P)

REV STATUS OF SHEETS	REV																
	SHEET NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
APPROVALS	DATE	XSIS ELECTRONICS, INC.															
PREP. S. Gupta	4/12/22	12620 W. 63 rd Street, Shawnee, KS 66216 USA															
ENG. M. Gupta	4/12/22	XE7K SERIES HC/ACMOS OSCILLATORS															
Q. A. M. Gupta	4/12/22	FSC NO.								DWG. NO.							
CUST. ENG.		57051								XE7K							
CUST Q A.		SCALE								SHEET							
		N/A								1 OF 11							

1. SCOPE:

XE7K Series, HC/ACMOS, high reliability hybrid microcircuit crystal oscillators are designed, produced and tested by Xsis Electronics, Inc. as MIL-PRF-38534 (modified), Class K equivalent devices, as described herein, for use in high reliability industrial, military, avionics and space applications. These devices are of hybrid microcircuit technology conforming to MIL-PRF-55310, Type 1, Class 2 oscillators.

1.1 ALTERNATE MODELS: Models XE7E, XE7B and XE7P with reduced QCI and/or reduced screening and shorter lead times are also offered as explained on page 5.

2. APPLICABLE DOCUMENTS:

MIL-PRF-55310F	Oscillator, Crystal Controlled, General Specifications for
MIL-PRF-38534K	Hybrid Microcircuits, General Specifications for
MIL-STD-883L	Test Methods and Procedures for Microelectronics

3. REQUIREMENTS:

3.1 General: The individual item requirements shall be as specified herein.

3.2 Package: Ceramic, 90% Min. Al₂O₃. Weight 0.4 g Max., Thermal Resistance, θ_{JC} : 50 °C / Watt.

3.2.1 Termination Finish: 1.27 μ m minimum gold plate over 2.0 μ m minimum nickel plate. Hot Solder tinning with Sn63/Pb37 solder per MIL-PRF-55310 is optional at an additional cost.

3.2.2 Reflow Soldering: Reflow soldering at 260 °C for 10 seconds shall not degrade the performance.

3.3 Hermeticity: Resistance welded, hermetically sealed, leak rate of 1 x (10)⁻⁸ atm-cc/s Max.

3.4 Marking: As a minimum, the parts shall be marked with Xsis P/N, ESD symbol, date code and serial number.

3.5 Absolute Maximum Ratings: Unless otherwise specified, absolute maximum ratings shall be as follows:

Supply Voltage	See Table I
Operating Free-Air Temperature Range	-55°C to +125°C
Storage Temperature	-55°C to +125°C

3.6 Electrical Characteristics: See Table I

3.6.1 Total Dose Radiation: Hybrid Microcircuit Crystal Oscillators shall be capable of meeting the electrical characteristics of Para. 3.6 after being exposed to total ionizing dose radiation of 100 krads as per MIL-STD-883, method 1019.

3.7 Hybrid Elements:

3.7.1 Quartz Crystals: A high grade cultured quartz crystal shall be used. As an option, Xsis will use a premium Q swept quartz crystal at an additional charge, refer to part numbering example in paragraph 6 to specify swept quartz crystal. Crystal element evaluation shall be in accordance with MIL-PRF-55310.

3.7.2 Crystal Mounting: The crystal element shall be mounted at 4 points in such a manner as to provide adequate ruggedness and performance under extreme environments specified herein.

3.7.3 Passive Elements: Established Reliability (ER) QPL components, failure level R minimum shall be used or element evaluation shall be as per MIL-PRF-38534, Level K.

XSIS ELECTRONICS, INC.
12620 W. 63rd St., Shawnee, KS 66216 USA
Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com

FSC NO. 57051	DWG. NO. XE7K	REV C
SCALE N/A	SHEET 2 OF 11	

- 3.7.4 The Microcircuit die shall be from lots that have passed the element evaluation per MIL-PRF-38534, Level K. In addition, ionizing radiation testing shall be performed at the oscillator level as explained in paragraph 3.7.5 herein.
- 3.7.5 For Output Frequencies up to 70 MHz for 2.5V parts, and up to 90 MHz for 3.3V & 5.0V parts, the microcircuit die shall be from NSC/FC 54ACT family. For higher output frequencies, the microcircuit die shall be from 0.8 μm BiCMOS Si family. The Microcircuit die shall be from wafer lots that have been successfully tested in the oscillator for ionizing radiation up to 100 krad. Xsis Electronics has also performed SET & SEL testing on both types of microcircuit die stated above. Both die are SEL immune for LET of up to 95 Mev-cm²/mg. Test reports are available on request.
- 3.7.6 Workmanship, Rework and Process controls shall be in accordance with the requirements of MIL-PRF-55310 and MIL-PRF-38534 as applicable.
- 3.7.7 Lot Traceability: Production lot for these oscillators shall be homogenous. Each element used in the production lot shall be traceable to a single lot. Swept quartz shall be traceable to the quartz bar, and its applicable processing details.
- 3.7.8 Prohibited Materials: The following items shall not be used in these oscillators: Pure Tin (Sn >97%), Cadmium, Zinc, Mercury, Selenium, Silver as under plate. Gold Plating without a nickel barrier.
- 3.7.9 Element Derating: All active and passive elements shall be derated in accordance with the applicable Hybrid microcircuit requirements of MIL-STD-975. Elements shall not operate in excess of derated values.
- 3.7.10 Material Outgassing: All materials shall meet a TML of 1% Max. and a CVCm of 0.1% Max., when tested in accordance with ASTM E595.
4. QUALITY ASSURANCE PROVISIONS: The quality assurance provisions shall be as specified herein.
- 4.1 100% Screening: The 100% screening shall be performed as per Table II. PDA requirements for nondestructive bond pull, burn-in and frequency aging shall be as specified below.
- 4.2 PDA for Nondestruct Bond Pull: Unless otherwise specified, PDA shall be 2% of total number of wires or one wire whichever is greater.
- 4.3 PDA for Burn-in: Unless otherwise specified, PDA for burn-in #2 shall be 2% or 1 oscillator whichever is greater and shall be applicable to +23 °C and/or +25 °C static tests only. In addition Delta Calculation shall be performed after Burn-in and shall count for PDA. All measured values for Delta Calculation shall be recorded. Parts that exceed the specified delta limits shall be rejected and be counted for PDA. Delta Calculation shall be performed at 2.5 VDC, 3.3 VDC or 5.0 VDC as applicable for the following parameters:
- | | |
|-------------------|---------------------|
| Input Current | 10% change Maximum |
| Output High Level | 10% change Maximum |
| Output Low Level | 0.1V change Maximum |
- 4.4 PDA for Frequency Aging: 5% or 1 oscillator whichever is greater. Delta limit for frequency aging shall be as specified in Table I.
- 4.5 Group A inspection shall be performed as per Table III.
- 4.6 Group B inspection shall be performed as per Table IV.
- 4.7 If required by the purchase order, Group C inspection shall be performed as per Table V.

NOTE: Frequency accuracy limit after life test shall be increased by 10 PPM to allow for Accelerated frequency aging at +125°C.

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 3 OF 11	

- 4.8 Group D inspection per Table VI is omitted because it is performed as a part of receiving inspection of packages.
- 4.9 Inspection and Test Data: Unless otherwise specified in the purchase order, the following Inspection and test data documentation shall be supplied with the parts.

(See Page 5 for the description of the Model Numbers XE7E, XE7B & XE7P)

Model XE7K:

Certificate of Conformance
 Summary of Screening Test Results per Table II
 PDA Calculations for Non-Destruct Bond Pull and Burn-in
 Summary of Elements Lot Traceability
 Electrical Tests before and after Burn-in
 Group A Inspection Summary
 Group B Inspection Data
 Group C Inspection Data, if required by the purchase order
 Group D Inspection Data
 Radiographic Inspection Certificate

Model XE7E:

Certificate of Conformance
 Summary of Screening Test Results per Table VII
 Summary of Elements Lot Traceability
 Group A Inspection Summary
 Radiographic Inspection Certificate

Model XE7B:

Certificate of Conformance
 Summary of Screening Test Results per Table VII
 Group A Inspection Summary
 Radiographic Inspection Certificate, if required by the Purchase Order

Model XE7P:

Certificate of Conformance

- 4.10 The following test and inspection options are available at customer request.


Customer Source Inspection for Pre-Cap and Final
 DPA (Destructive Physical Analysis)
 Group C testing per Table V

5. PRESERVATION, PACKAGING AND PACKING:

The oscillators shall be clean, dry and packaged in a manner to provide adequate protection against electrostatic discharge, corrosion, deterioration and physical damage during shipment.

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 4 OF 11	

6. PART NUMBERING EXAMPLE:

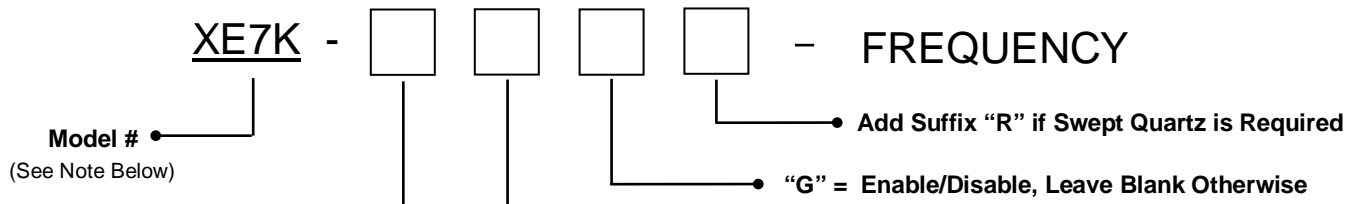

Supply Voltage

A = 5.0 V ± 10%
L = 3.3 V ± 10%
N = 2.5 V ± 10%

*** Overall Frequency Accuracy Options**

- 1 = ± 50 PPM -10°C to +70°C
- 2 = ± 25 PPM -10°C to +70°C
- 3 = ± 100 PPM -40°C to +85°C
- 4 = ± 50 PPM -40°C to +85°C
- 5 = ± 25 PPM -40°C to +85°C
- 6 = ± 100 PPM -55°C to +125°C
- 7 = ± 75 PPM -55°C to +125°C
- 8 = ± 60 PPM -55°C to +125°C

* Overall Frequency Accuracy includes effects of Operating Temperature, Supply Voltage, Load variations and 5 year aging

P/N Example: XE7K- L8 -100.000 MHz = 100.000 MHz, 3.3V Oscillator, ± 60 PPM Overall Frequency Accuracy over operating temperature range of -55°C to +125°C,

NOTE: Besides model **XE7K** above, the following additional models are available for applications that can accommodate reduced level of Elements, Screening and Quality Conformance inspection:

XE7E: **Model XE7E** uses the same design and elements as **Model XE7K** except as follows:

- 100% screening is as per Table VII herein
- PDA for Burn-in is 10% or 1 unit whichever is greater
- Delta measurements of paragraph 4.3 are not applicable
- Group A inspection is as per MIL-PRF-55310, Class B
- Group B, Group C & Group D inspections are not applicable

XE7B: **Model XE7B** is same as **Model XE7E** except as follows:


- Active and Passive Elements are as per MIL-PRF-55310, Class B. Microcircuit die is the same as in Model XE7K but is not from a radiation tested wafer lot.
- Radiographic Inspection is not applicable, unless required by the Purchase Order at additional cost.

XE7P: **Model XE7P** is a form, fit and function equivalent prototype of **Model XE7K**.


- Prototypes may use commercial grade elements and are not screened.
- Quality Conformance inspection is not applicable.

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 5 OF 11	


7. PACKAGE OUTLINE:



PAD#	FUNCTION
1	E/D (Optional)
2	GND/CASE
3	OUTPUT
4	VDD



Dimensions: Inches (mm).

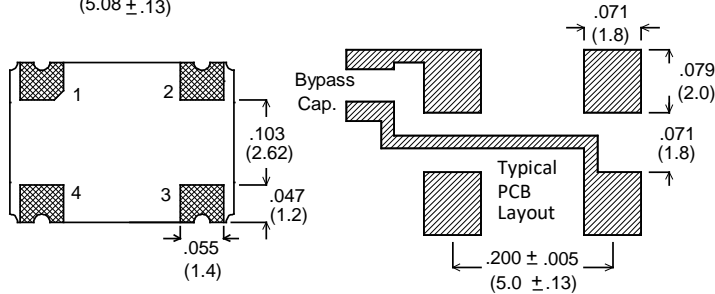

Tristate Input: A "Low" level at the input disables the Output into a high impedance state.

Tristate Input has internal pull-up, it can be left floating or connected to Vdd.

An External 0.01uF Bypass Capacitor is required between VDD and GND.

Figure 1 - Package Configuration & Pin Connections

Table I - Electrical Characteristics

Parameter	Spec. Limits		
	"N"	"L"	"A"
Frequency Range	500 KHz to 120 MHz	500 KHz to 125 MHz	500 KHz to 90 MHz
Input Voltage	+ 2.5 VDC ± 10%	+ 3.3 VDC ± 10%	+ 5 VDC ± 10%
Absolute Max. Applied Voltage	+ 5.0 VDC	+ 5.0 VDC	+ 7.0 VDC
Overall Frequency Accuracy ^{1/}	See Options in Paragraph 6.0		
Operating Temperature Range	See Options in Paragraph 6.0		
Input Current (no load)	2.5 mA Max. 500KHz - 5MHz 4 mA Max. 5MHz - 10MHz 6 mA Max. 10MHz - 20MHz 8 mA Max. 20MHz - 30MHz 12 mA Max. 30MHz - 40MHz 16 mA Max. 40MHz - 50MHz 25 mA Max. 50MHz - 70MHz 35 mA Max. 70MHz - 120MHz	3 mA Max. 500KHz - 5MHz 5 mA Max. 5MHz - 10MHz 8 mA Max. 10MHz - 20MHz 10 mA Max. 20MHz - 30MHz 15 mA Max. 30MHz - 40MHz 20 mA Max. 40MHz - 50MHz 35 mA Max. 50MHz - 100MHz 40 mA Max. 100MHz - 125MHz	5 mA Max. 500KHz - 5MHz 10 mA Max. 5MHz - 10MHz 20 mA Max. 10MHz - 20MHz 25 mA Max. 20MHz - 30MHz 30 mA Max. 30MHz - 40MHz 35 mA Max. 40MHz - 50MHz 50 mA Max. 50MHz - 90MHz
Output Waveform	Square Wave, HC/ACMOS		
Output Duty Cycle (at 50% Output Levels)	55/45% Max		
Output Load	10K 15 pF		
High Output Level	0.9 VDD Min.		
Low Output Level	0.1 VDD Max.		
Tristate (Option G)	≥ 0.7 Vdd or Open:Normal Output, ≤ 0.3 Vdd:High Impedance	≥ 2.2 V or Open:Normal Output, ≤ 0.8 V High Impedance	
Rise & Fall Times (at 10 to 90% Output Levels)	6 nS Max for Frequency ≤ 25.00 MHz 4 nS Max for Frequency 25.01 MHz to 45.00 MHz 3 nS Max. for Frequency > 45MHz		5 nS Max. Frequency ≤ 40 MHz 3 nS Max. Frequency ≥ 40 MHz
Start-up Time	10 mS Max.		
Phase Jitter	0.5 pS rms typ, (10 KHz to 20 MHz Integrated)		0.3 pS rms typ. (10 KHz to 20 MHz Integrated)
Frequency Aging @ 70°C	± 1.5 PPM Max. / 30 days, ± 5 PPM Max. First Year, ± 2.5 PPM Max. / Year thereafter		

^{1/} Overall Frequency Accuracy includes calibration tolerance, frequency change due to Operating temperature, Supply Voltage and Load variations of ± 10% and 5 year aging.

Contact Xsis Engineering for any other special requirements.

XSIS ELECTRONICS, INC. 12620 W. 63rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 7 OF 11	

Table II - Model XE7K, Modified MIL-PRF-38534, Class K Screening (100%)

Test - Inspection	Test Method – Condition
Nondestructive Bond Pull	MIL-STD-883, Method 2023
Internal Visual	MIL-STD-883, Method 2017, Level S
Stabilization Bake (Prior to Seal) <u>1/</u>	MIL-STD-883, Method 1008, Condition C (+150 °C), 48 hours minimum
Temperature Cycling	MIL-STD-883, Method 1010, Condition C
Constant Acceleration	MIL-STD-883, Method 2001, Condition A Y ₁ axis only (5000 G)
Seal (Fine and Gross Leak)	MIL-PRF-55310, Para. 4.8.2.2.2
Particle Impact Noise Detection (PIND)	MIL-STD-883, Method 2020, Condition A
Radiographic Inspection	MIL-STD-883, Method 2012, Class S
Pre Burn-in Electrical Tests: Record as applicable	Refer to Table II-a below
Burn-in #1	+125 °C, Nominal Supply Voltage and Burn-in load, 160 Hours Minimum
Interim Electrical Tests: Record as applicable	Refer to Table II-a below
Burn-in #2	+125 °C, Nominal Supply Voltage and Burn-in load, 160 Hours Minimum
Post Burn-in Electrical Tests: Record as applicable	Refer to Table II-a below
Frequency Aging 30 days	Per MIL-PRF-55310
Seal (Fine and Gross Leak)	MIL-PRF-55310, Para. 4.8.2.2.3
External Visual	MIL-STD-883, Method 2009

1/ Vacuum bake and maintain oscillators in dry nitrogen per MIL-PRF-55310.

Table II-a – Pre, Interim & Post Burn-in Electrical Tests

Test Parameter	MIL-PRF-55310 Method	Pre BI 24 ± 1 °C	Interim BI 24 ± 1 °C	Post BI 24 ± 1 °C	Post BI Low Temp	Post BI High Temp
Input Current	4.8.5	✓	✓	✓	✓	✓
Output Frequency	4.8.6	✓	✓	✓	✓	✓
Frequency Vs. Temperature Stability	4.8.10.1	✓	✓	✓	✓	✓
Frequency Vs. Supply Voltage	4.8.14	✓	✓	✓	✓	✓
Output Voltage Levels	4.8.21.3	✓	✓	✓	✓	✓
Output Rise & Fall Times	4.8.22	✓	✓	✓	✓	✓
Output Duty Cycle	4.8.23	✓	✓	✓	✓	✓
Start-up time	4.8.29	✓	✓	✓	✓	✓
Enable/Disable, if applicable	4.8.28	✓	✓	✓	✓	✓

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 8 OF 11	

Table III - Model XE7K, Group A Inspection 1/

Test - Inspection	Test Method – Condition
Input Current Frequency Accuracy Frequency Vs. Supply Voltage Tolerance Output Waveform Output Voltage Levels Output Rise & Fall Times Output Duty Cycle Start-up time Output Enable/Disable Function if Applicable	24 ± 1 °C, Applicable Method of MIL-PRF-55310
Frequency Vs. Temperature Stability	Measure output frequency at ten equispaced points of the operating temperature range.

1/ Any electrical tests performed as part of final electrical tests in 100% screening need not be repeated.

Table IV - Model XE7K, Group B Inspection 1/

Subgroup	Test - Inspection	MIL-STD-883		Quantity (Accept No.)
		Method	Condition	
1	Physical Dimensions	2016	-	2(0)
2	PIND 2/	2020	A	15(0)
3	Resistance to Solvents 3/	2015	-	3(0)
4	Internal Visual & Mechanical 4/	2014	-	1(0)
5	Bond Strength 5/	2011	C or D	2(0)
6	Die Shear Strength 6/	2019	-	2(0)
7	Solderability	2003	Solder Temp. 245 ± 5 °C	1(0)
8	Seal (Fine & Gross) 7/	1014	A1 or B1 & B3	15(0)

1/ Non-catastrophic screening rejects may be used for Group B testing.

2/ This test is performed during 100% screening.

3/ This test is performed on each lot of marking ink.

4/ Internal Visual inspection is performed at pre-seal on each unit.

5/ This test is performed prior to seal in accordance with Group B bond strength requirements of MIL-PRF-38534.

6/ This test is performed prior to seal in accordance with Group B die shear strength requirements of MIL-PRF-38534.

7/ Fine and Gross tests are being performed during 100% screening.

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 9 OF 11	

Table V - Model XE7K, Group C Inspection

Subgroup	Test - Inspection	MIL-STD-883		Quantity (Accept No.)
		Method	Condition	
1	External Visual	2009	-	5(0) <u>1/</u>
	PIND	2020	A	
	Temperature Cycling	1010	C, 20 cycles	
	Constant Acceleration	2001	5000G, Y ₁ Axis	
	Seal (Fine Leak)	1014	A1 or B1	
	Seal (Gross Leak)	1014	B3	
	Visual Examination	1010	-	
	End Point Electricals	-	-	
2	End Point Electricals Steady State Life End Point Electricals <u>4/</u>	1005	1000 Hours at 125°C	5(0) <u>2/</u>
3	Internal Gas Analysis	1018	-	3(0) <u>3/</u>

1/ Five units are used for Group C inspection in accordance with limited usage requirements of MIL-PRF-38534

2/ Subgroup 1 test samples are not recommended to be used for Subgroup 2 testing

3/ Subgroup 1 test samples shall be used for Subgroup 3 testing.

4/ Frequency accuracy limit shall be increased by 10 PPM to allow for accelerated frequency aging during life test.

Table VI - Model XE7K, Group D Inspection

Subgroup	Test - Inspection	MIL-STD-883		Quantity (Accept No.)
		Method	Condition	
1	Thermal Shock	1011	C	5(0)
	Stabilization Bake	1008	1 hour at 150 °C	5(0)
	Lead Integrity	2004	B2 (lead fatigue)	1(0)
	Seal (Fine & Gross)	1014	A1 or B1 & C	5(0)

Group D inspection is not required when package evaluation has been performed as a part of receiving inspection.

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 10 OF 11	

Table VII - Models XE7E & XE7B, Screening (100%)

Test - Inspection	Test Method – Condition
Nondestructive Bond Pull	MIL-STD-883, Method 2023
Internal Visual	MIL-STD-883, Method 2017, Level B
Stabilization Bake (Prior to Seal) <u>1/</u>	MIL-STD-883, Method 1008, Condition C (+150 °C), 24 hours minimum
Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Constant Acceleration	MIL-STD-883, Method 2001, Condition A Y ₁ axis only (5000 G)
Seal (Fine & Gross)	MIL-PRF-55310, Para. 4.8.2.2.2
Particle Impact Noise Detection (PIND)	MIL-STD-883, Method 2020, Condition A
Radiographic Inspection (Model XE7E only) <u>2/</u>	MIL-STD-883, Method 2012, Class S
Pre Burn-in Electrical Tests: Verify Measurements	Refer to Table VII-a below
Burn-in	+125 °C, Nominal Supply Voltage and Burn-in load, 160 Hours Minimum
Post Burn-in Electrical Tests: Verify Measurements	Refer to Table VII-a below
External Visual	MIL-STD-883, Method 2009

1/ Vacuum bake and maintain oscillators in dry nitrogen per MIL-PRF-55310.

2/ Radiographic Inspection is applicable to **Model XE7E** only.

Table VII-a - Pre & Post Burn-in Electrical Tests

Test Parameter	MIL-PRF-55310 Method	Pre BI 24 ± 1 °C	Post BI 24 ± 1 °C	Post BI Low Temp	Post BI High Temp
Input Current	4.8.5	✓	✓	✓	✓
Output Frequency at 23 to 25 °C	4.8.6	✓	✓	✓	✓
Frequency Vs. Temperature Stability	4.8.10.1	✓	✓	✓	✓
Frequency Vs. Supply Voltage	4.8.14	✓	✓	✓	✓
Output Voltage Levels	4.8.21.3	✓	✓	✓	✓
Output Rise & Fall Times	4.8.22	✓	✓	✓	✓
Output Duty Cycle	4.8.23	✓	✓	✓	✓
Start-up time	4.8.29	✓	✓	✓	✓
Enable/Disable, if applicable	4.8.28	✓	✓	✓	✓

XSIS ELECTRONICS, INC. 12620 W. 63 rd St., Shawnee, KS 66216 USA Tel: 913-631-0448 e-mail: xsis@xis.com website: www.xsis.com	FSC NO. 57051	DWG. NO. XE7K	REV C
	SCALE N/A	SHEET 11 OF 11	