



XE20-100 SERIES (TTL), 5.0 VDC STANDARD SPECIFICATIONS

(Similar to M55310/09)

| | |
|-------------------------------------|------------------------|
| Frequency Range | 400 KHz to 100 MHz |
| Frequency Accuracy @ + 25 °C | ± 0.0015% (± 15 PPM) |
| Frequency Stability Vs. Temperature | See Options Below |
| Operating Temperature Range | See Options Below |
| Input Voltage | + 5 VDC ± 10% |
| Input Current @ +5.0 VDC | |
| 400 KHz to 5.0 MHz | 10 mA Max. |
| 5.1 MHz to 20.0 MHz | 20 mA Max. |
| 20.1 MHz to 40.0 MHz | 30 mA Max. |
| 40.1 MHz to 60.0 MHz | 40 mA Max. |
| 60.1 MHz to 100.0 MHz | 60 mA Max. |

| | |
|--|------------------------|
| Output | TTL (10 Loads) |
| Symmetry | 60/40% @ 1.4 VDC Level |
| Rise & Fall Times (0.6 VDC to 2.2 VDC) | |
| ≤ 20 MHz | 10 nS Max. |
| > 20 MHz | 5 nS Max. |


Enable/Disable See Options Below

Start-Up Time 5 mS Max.

Frequency Stability Vs. Voltage ± 0.0004% (± 4 PPM) Max.
(for 10% change in Voltage)

Aging @ +25 °C ± 5 PPM Max. first year, ± 2 PPM Max./ Yr. thereafter

Package, Seal & Lead Finish Conforms to the Requirements of MIL-PRF-55310

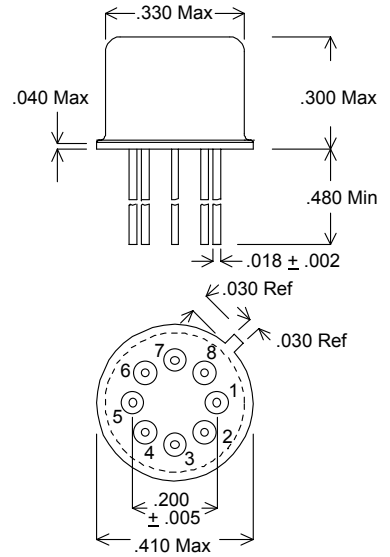

All Dimensions are in inches.

| Pin # | Function |
|------------|----------------|
| 3 | E/D (Optional) |
| 4 | GND/CASE |
| 5 | OUTPUT |
| 8 | B+ |
| All Others | N/C |

Contact Xsis Engineering for special requirements such as, **Output Symmetry, Start-up Time, Frequency Accuracy, Complementary Outputs, Multiple Outputs, etc.**

ORDERING INFORMATION (Select from options below) :



Frequency Stability ●

- 1 = ± 0.1%
- 2 = ± 0.05%
- 3 = ± 0.01%
- 4 = ± 0.005%
- 5 = ± 0.002% *

* Option 5 not available for - 55 °C to +125 °C
& - 55 °C to +105 °C

● Operating Temperature Range

- 1 = 0 °C to + 70 °C
- 2 = - 30 °C to + 85 °C
- 3 = - 55 °C to +125 °C
- 4 = - 55 °C to +105 °C
- 5 = - 40 °C to + 95 °C

● Add Suffix " 883B " for Mil-Screened Option

● Add Suffix " G " for Enable/Disable Option **

** Enable/Disable Input: A "low" level at the input disables the output to a HI-Z state. Enable/disable input has internal pull-up.

EXAMPLE: XE20 -143 - 883B - 24.000 MHz = TTL Output, ± 0.005% over -55 °C to +125 °C, Mil - Screened , and Output Frequency of 24.000 MHz